


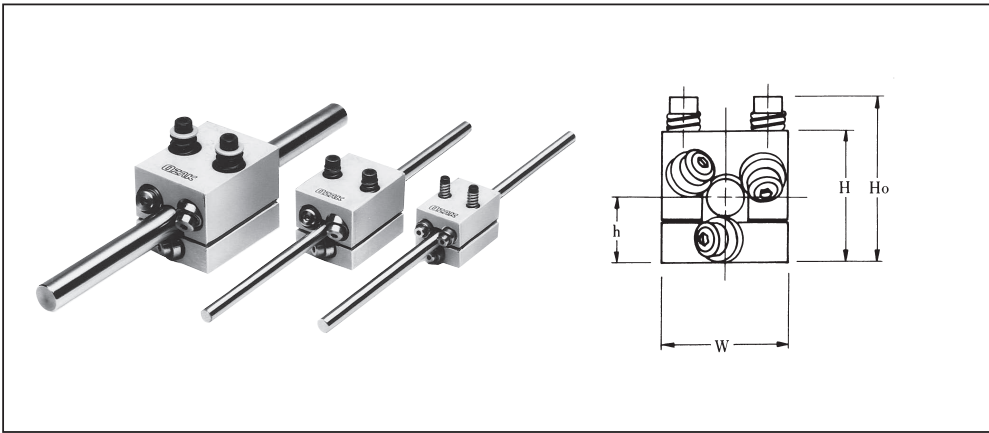


表285：SFSシリーズ寸法表

型 番	軸 径 d	リード ℓ	主 要			
			h	W	L	Lo
SFS-0825	8	2.5	14.5	28.4	41.1	57.2
SFS-0815	8	15	19.3	38.1	50.8	71.4
SFS-1215	12	15	19.3	38.1	50.8	71.4
SFS-1225	12	25	19.3	38.1	50.8	71.4
SFS-1615	16	15	25.6	50.8	63.5	85.8
SFS-1625	16	25	25.6	50.8	63.5	85.8
SFS-2525	25	25	38.1	76.2	63.5	90.4
SFS-4010	40	10	57.2	114.3	69.9	118.9
SFS-5050	50	50	57.2	114.3	69.9	118.9

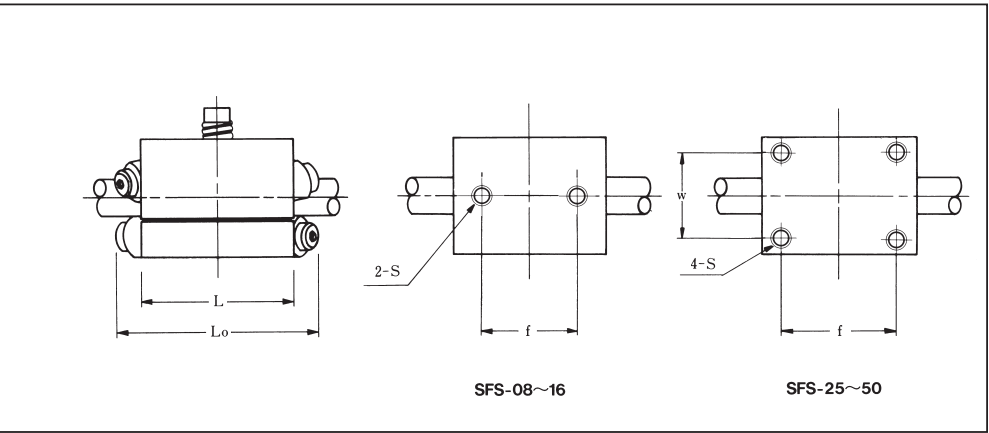

寸 法					単位：mm		
H	Ho	w	f	S	定格スラスト荷重 Fa (N)	基本動定格荷重 C (N)	質 量 (kg)
29	42.2	—	19	M3×0.5 深サ 6	20	150	0.15
38.6	48.5	—	25.4	M5×0.8 深サ 9	130	490	0.25
38.6	48.5	—	25.4	M5×0.8 深サ 9	130	490	0.25
38.6	48.5	—	25.4	M5×0.8 深サ 9	130	490	0.25
51.3	68.3	—	31.8	M6×1.0 深サ12	270	980	0.50
51.3	68.3	—	31.8	M6×1.0 深サ12	270	980	0.50
76.2	88.9	63.5	38	M6×1.0 深サ12	450	1960	1.05
114.3	118.9	101.6	38	M6×1.0 深サ12	880	3430	2.70
114.3	118.9	101.6	38	M6×1.0 深サ12	880	3430	2.70

* Ho：スラスト荷重が無い場合