


表265 : TMK, TMK-OHシリーズ寸法表 (右, 左ネジ)


ナット型番		ナット主要									
油穴なし 右ネジ 左ネジ	油穴付 右ネジ 左ネジ	ピッチ P	D_{hs}	D_f	P.C.D	K	L	R	r	T	F
TMK10 TMK10L	TMK10-OH TMK10L-OH	2	20	36	26	22	24	1	0.5	5	6
TMK12 TMK12L	TMK12-OH TMK12L-OH	2	22	44	31	24	30	1	0.5	5	7
TMK14 TMK14L	TMK14-OH TMK14L-OH	3	22	44	31	24	30	1	0.5	5	7
TMK16 TMK16L	TMK16-OH TMK16L-OH	3	28	51	38	30	35	1	0.5	6	8
TMK18 TMK18L	TMK18-OH TMK18L-OH	4	32	56	42	34	40	1.5	0.5	6	10.5
TMK20 TMK20L	TMK20-OH TMK20L-OH	4	32	56	42	34	40	1.5	0.5	6	10.5
TMK22 TMK22L	TMK22-OH TMK22L-OH	5	36	61	47	40	50	1.5	0.5	7	14
TMK25 TMK25L	TMK25-OH TMK25L-OH	5	36	61	47	40	50	1.5	0.5	7	14
TMK28 TMK28L	TMK28-OH TMK28L-OH	5	44	76	58	48	56	2	0.5	8	15
TMK32 TMK32L	TMK32-OH TMK32L-OH	6	44	76	58	48	56	2	0.5	8	15
TMK36 TMK36L	TMK36-OH TMK36L-OH	6	52	84	66	56	60	2	0.5	8	17
TMK40 TMK40L	TMK40-OH TMK40L-OH	6	58	98	76	62	70	2	0.5	10	19

* 右ネジは軸径の後無記号, 左ネジは軸径の後にL記号で表示します。

呼び番号 ナット型番 ネジ軸型番
 TMK20 - TM20 × 500
 ネジ軸外径 ネジ軸長さ

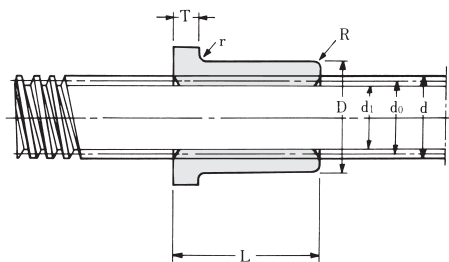

TMK

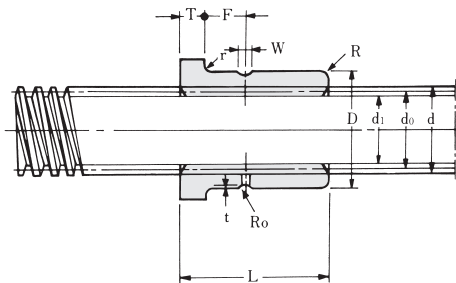

TMK-OH

単位 : mm

寸 法							ネジ軸型番 右ネジ 左ネジ	ネジ軸主要寸法				
S	H	W	Ro	t	Fa (kN)	質量 (kg)		d	有効径 d ₀	谷径 d ₁	リード角 α°	質量 (kg/m)
4.3	1.5	2.5	1.8	0.5	1.2	0.07	TM10 TM10L	10	9	7.5	4°03'	0.6
5.4	1.5	2.5	1.8	0.5	1.9	0.10	TM12 TM12L	12	11	9.5	3°19'	0.8
5.4	1.5	2.5	1.8	0.5	2.3	0.09	TM14 TM14L	14	12.5	10.5	4°22'	1.0
6.6	1.5	2.5	1.8	0.5	3.1	0.18	TM16 TM16L	16	14.5	12.5	3°46'	1.3
6.6	2	3	2.5	0.5	4.1	0.23	TM18 TM18L	18	16	13.5	4°33'	1.6
6.6	2	3	2.5	0.5	4.6	0.23	TM20 TM20L	20	18	15.5	4°03'	2.0
6.6	2.5	3.5	2.5	0.7	5.8	0.38	TM22 TM22L	22	19.5	16.5	4°40'	2.3
6.6	2.5	3.5	2.5	0.7	6.6	0.31	TM25 TM25L	25	22.5	19.5	4°03'	3.1
9	2.5	3.5	2.5	0.7	8.5	0.57	TM28 TM28L	28	25.5	22.5	3°34'	4.0
9	2.5	3.5	2.5	0.7	9.8	0.52	TM32 TM32L	32	29	25.5	3°46'	5.2
9	3	4	3.2	0.7	12.0	0.76	TM36 TM36L	36	33	29.5	3°19'	6.7
11	3	4	3.2	0.7	16.0	1.09	TM40 TM40L	40	37	33.5	2°57'	8.4